


Model 101 Micro-Trak™

Technical Data Sheet

Ultra Low Flow High Performance Digital Gas Mass Flow Meters and Controllers

Features

- Measure and Control Flow of Gas from 4 sccm down to 0.1 sccm (smlm)
- Digital performance
- Includes Dial-A-Gas multi-gas capability that enables use with 10 different gases
- Unique Pilot Module interface (local or remote) allows control and display of the following functions:
 - Gas
 - Setpoint value
 - Setpoint source
 - Engineering units
 - Output signal
 - Valve state
 - Full scale value
- All control functions are also available from your PC or workstation
- 316 stainless steel construction suitable for any clean gas, even corrosives and toxics
- Small footprint makes installation easy
- Single-sided power input reduces installation cost and complexity
- Every Micro-Trak Instrument includes:
 - RS-232 Communication
 - Analog communication
 - Software for Windows OS
 - Source code
 - Calibration certificate

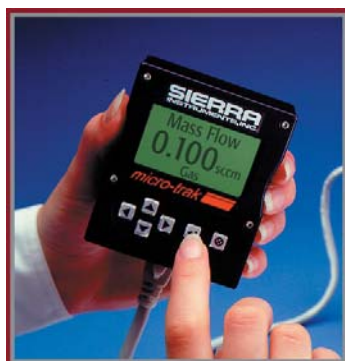

Description

Micro-Trak™ measures and controls micro mass flows of gas previously thought to be too low for a reliable reading. Micro-Trak is specifically designed for flow ranges under 4 sccm (smlm) with a minimum controllable mass flow rate of 0.1 sccm (smlm).

The Model 101 Micro-Trak is a specialized and highly engineered instrument for those who need accurate and reliable micro mass flow control of clean gases including corrosives and toxics. Micro-Trak™ is based on Sierra's award-winning family of digital instruments. As a result, ease of operation, field configuration, multi-gas capability and application flexibility are standard features.

Performance Specifications

Accuracy

± 1% of full scale including linearity at operating conditions

Dial-A-Gas

± 1% of full scale in all 10 standard gases

Repeatability

± 0.2% of full scale

Temperature Coefficient

± 0.025% of full scale per °F (0.05% of full scale per °C), or better

Pressure Coefficient

± 0.01% of full scale per psi (0.15% of full scale per bar), or better

Response Time

Governed by total volume of installation. Contact Sierra for suggestions on optimized installation.

Operating Specifications

Gases

All clean gases including corrosives & toxics; specify when ordering. The following ten gases make up the Dial-A-Gas® feature of every Micro-Trak™ instrument; up to nine alternate gases may be substituted.

Gas	Micro-Trak Flow Range (sccm)
Air	0.10 - 4.0
Argon	0.14 - 5.6
CO ₂	0.074 - 2.95
CO	0.10 - 4.0
Methane	0.075 - 3.0
Helium	0.14 - 5.6
Hydrogen	0.10 - 4.0
Oxygen	0.10 - 4.0
Nitrogen	0.10 - 4.0
N ₂ O	0.072 - 2.9



Note: Flow rates specified at 21° C and 760 mm Hg.

Other engineering units are available.

Gas Pressure

500 psig (34.5 barg) maximum, burst tested to 750 psig (52 barg)

Pressure Drop Across a Meter

0.36 psi (24.5 mbar)

Differential Pressure Requirement For Controllers

30 psi (2040 mbar) optimum

1 psi (68 mbar) minimum at 21° C with outlet at ambient pressure

Gas & Ambient Temperature

32°F to 122°F (0°C to 50°C)

Leak Integrity

5 X 10⁻⁹ standard cc/sec of helium maximum

Operating Specifications (Continued)

Power Requirements

(Ripple noise not to exceed 100mV peak-to-peak)

For Mass Flow Meters: 12-30 VDC (130 mA MAX)

For Mass Flow Controllers:

24 VDC ± 10% (400 mA, regulated) for C101

15-22 VDC ± 5% (800 mA) possible for 101L only using optional regulator 101 CONV

Control Range For Controllers

2-100% of full scale flow; automatic shut-off at 1.9%

Output Signal

Analog:

Linear 4-20 mA, 500 ohms maximum loop resistance and one of the following: Linear 0-5 VDC, 0-10 VDC, 1-5 VDC, 1000 ohms minimum load resistance

Digital:

RS-232; Pilot Module Display optional

Command Signal

Analog (choice of one):

Linear 4-20 mA, 0-5 VDC, 0-10 VDC, 1-5 VDC

Digital:

RS-232; Pilot Module Display optional


Wetted Material

316 stainless steel, 416 stainless steel; synthetic ruby, Viton® "O"-rings and valve seat standard; other elastomers are available (consult factory)


Physical Dimensions

All dimensions are in inches with mm in brackets. Certified drawings are available on request.

101 Micro-Trak™ Front View

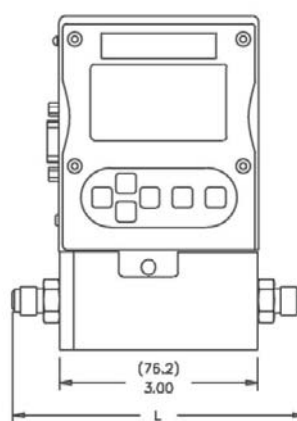

101 Micro-Trak™ Inlet View

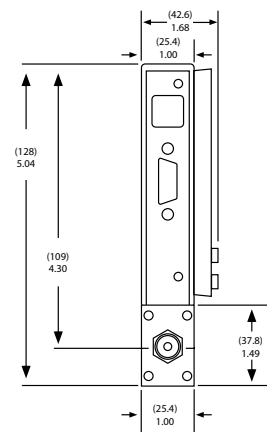

L dimension ranges from 4.6" [117] to 5.2" [132] depending on fittings used.

101 Micro-Trak™ Bottom View

